

ACCESSORY SETUP INSTRUCTION

FRONT HALF WINDSHIELD ASSEMBLY -- PN: 5DYV-805300-1001

VALID FOR: Z10&Z10-4

BEFORE YOU BEGIN: Read and understand the instructions before starting any work. Make sure that all parts are ready and that you have all the tools required for assembly.

NOTE: CFMOTO shall not be liable for any damage caused by incorrect assembly. CFMOTO recommends that all original accessories be assembled by an authorized CFMOTO dealer.

Before assembly, park the vehicle on a flat surface, put the transmission gear into Park (P) and turn off the key switch.

Zhejiang CFMOTO Power Co., Ltd. All rights reserved. Reproduction of this document, even in part, as well as copying of all kinds, is permitted only with the express written permission of the copyright owner.


MEANING OF SYMBOLS

i - Indicates information with more details or tips.

! - Indicates information of warning or danger.

PARTS LIST:


ITEM	PART NAME	PART NUMBER	QTY.	DESCRIPTION
1	Front half windshield assembly	5DYV-805300-1001	1	For structure reference only
2	Front half windshield	5DYV-805301-1000	1	
3	Round clamp	5DYV-805110-1000	2	
4	Seal strip end cap of driver side	5DYV-805102-1000	1	
5	Seal strip end cap of passenger side	5DYV-805102-1000	1	
6	Threadlocker	5DYV-805100-1000-23	1	
7	Hexagon key T25	5DYV-805100-1000-22	1	
8	Rear panel upper service cover	5GY0-042081-1000	1	

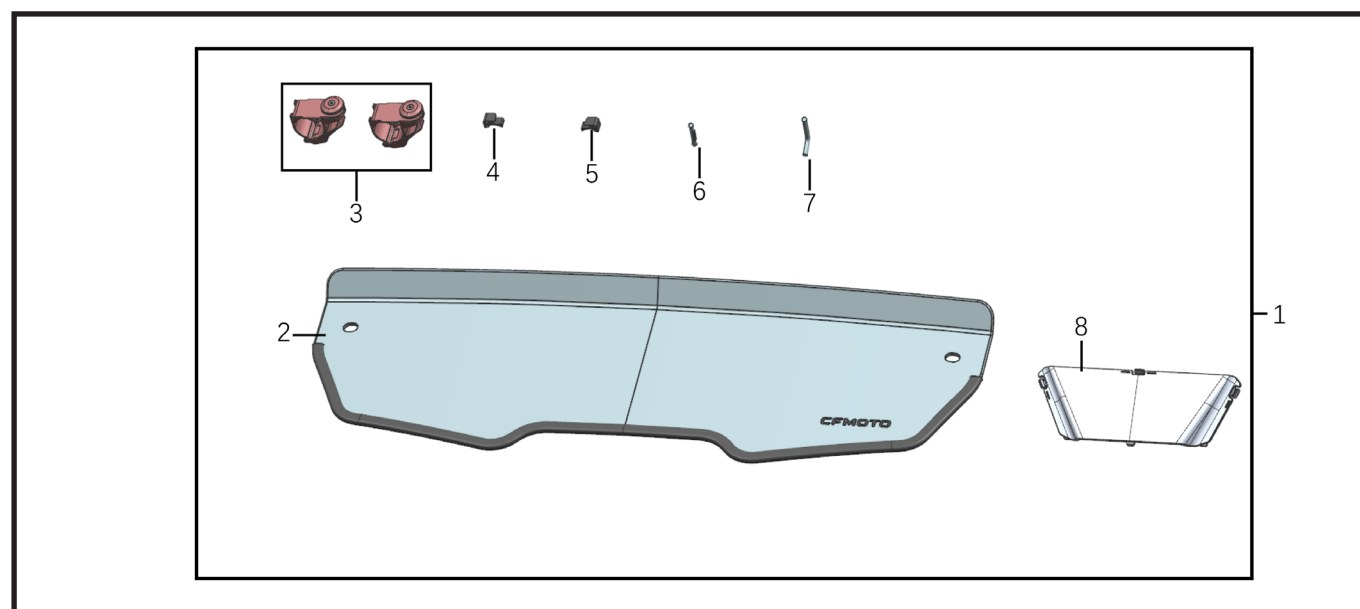


TOOL LIST:

ITEM	DESCRIPTION	QTY.	DESCRIPTION
1	Protective gloves	1	Recommended tools, which are not included in the package.
2	Hexagon key T25	1	

ASSEMBLY AND INSTALLATION

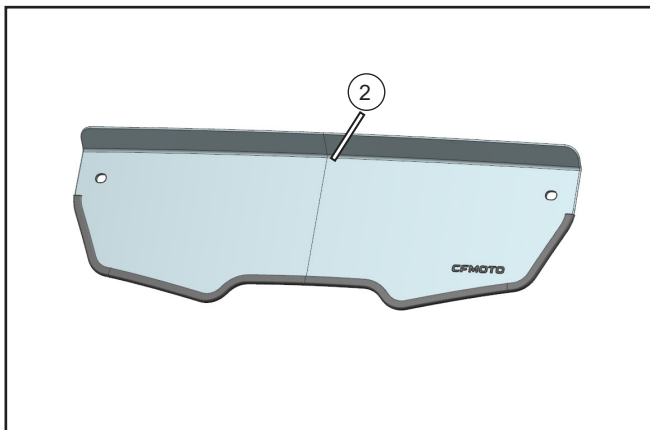


// Remove the plastic film from the front half windshield (2) surface.

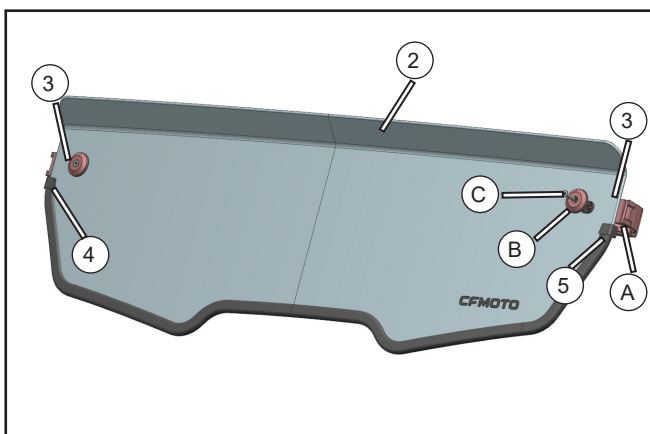


// Place the front half windshield (2) on the operation table. Install two round clamps (3) orderly. Place the clamp (A) into the front half windshield and then finger-tighten the press cover (B) and screw (C). Buckle the driver side of the tape clip (4) and the passenger side of the tape clip (5) into the end of the windshield tape.

i Apply the Threadlocker.

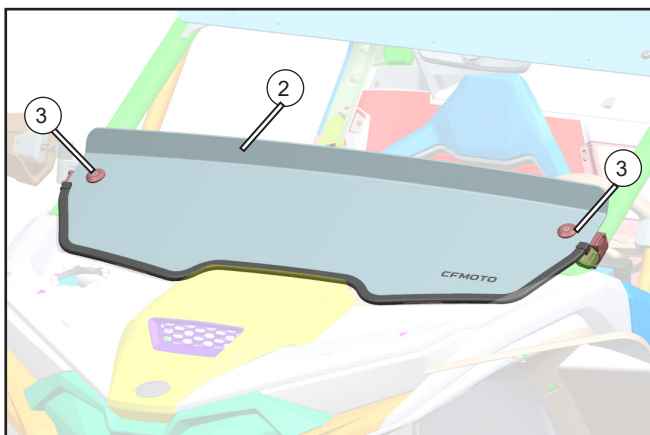


// Place the front half windshield (2) into the assembly position, and tighten two round clamps (3).

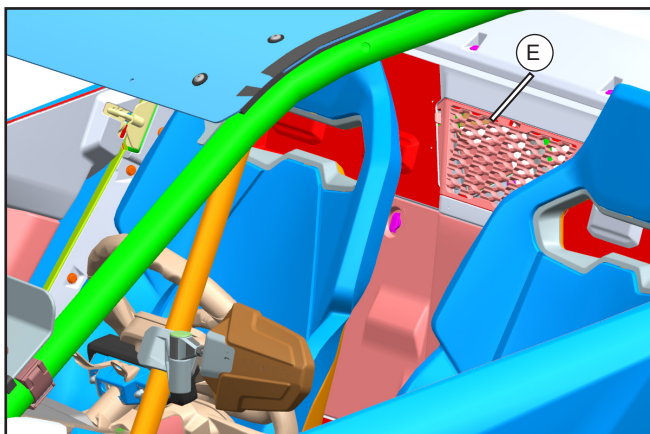

// Remove the original rear panel's upper service cover (E).

i - This part must be removed and replaced when installing the front half windshield.

ASSEMBLY AND INSTALLATION

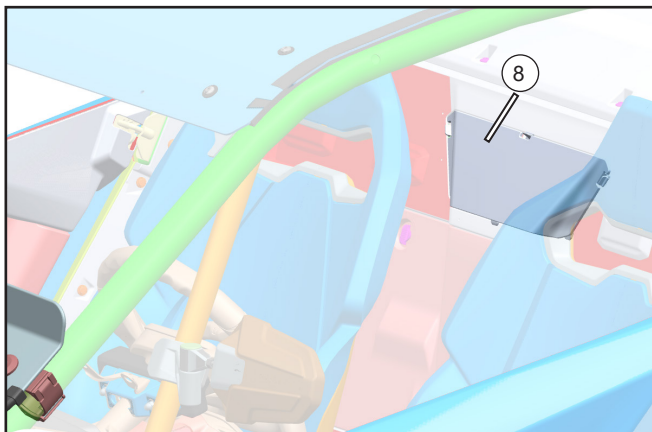


// Install the fender upper service cover (8).



- The fender upper service cover (8) must be installed before installing the front windshield, and close the vent here.



- If the fender upper service cover (8) isn't installed before installing the front windshield, the vehicle's cooling performance will be affected.

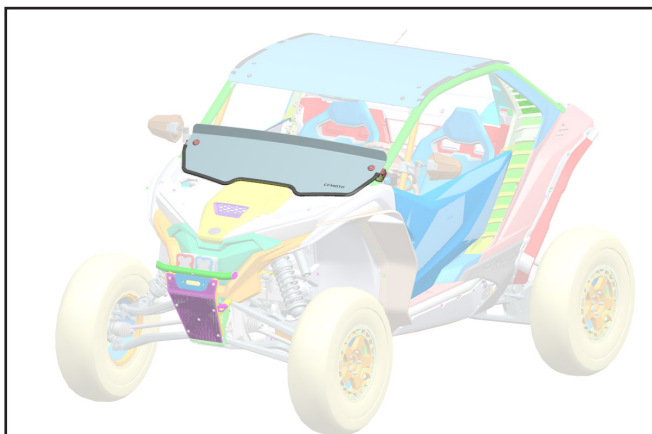

// The assembly of the FRONT HALF WINDSHIELD ASSEMBLY is completed.